

LID DETAILS



Primary Material	DUCTILE IRON
Number of Parts	1
Load Class	D
Clear Opening	600MM X 600MM

Native Backfill as per Manufacturer's Specifications

Ground to slope away from PU lid

high concrete plinth surround

150

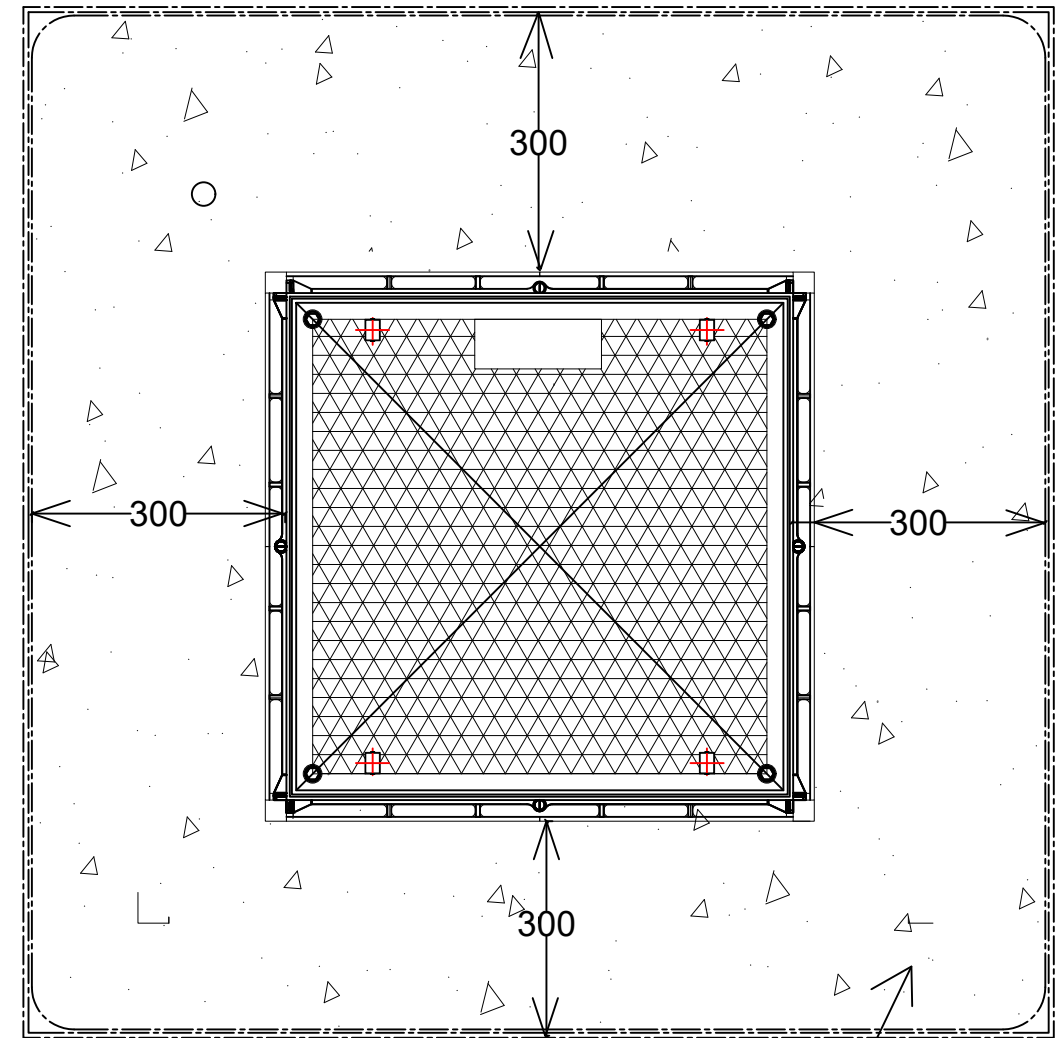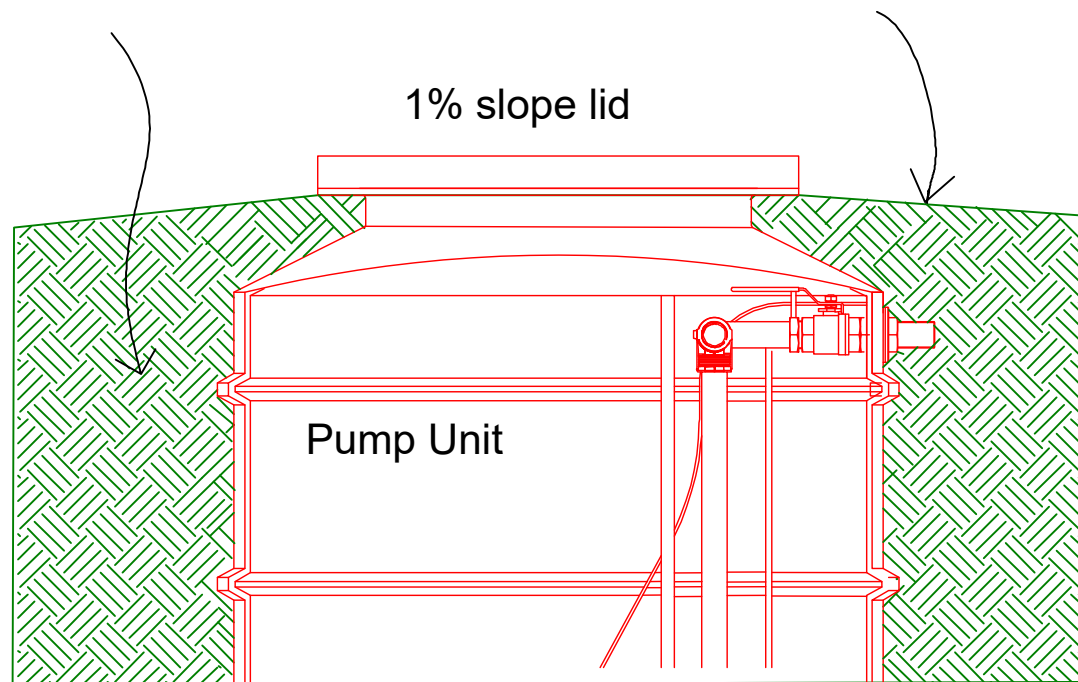

Concrete Plinth Surround 25 mPa strength

BY:	DATE:	REV:	DESCRIPTIONS:	DATE:	APPROV:
DESIGNED:	FM				
DRAWN:	FM				
DSGN CHECKED:	-				
DWG CHECKED:	-				
APPROVED:	-				

PROJECT TITLE:

APIA PRESSURE SEWER CHAMBERS RECTIFICATION WORKS PHASE 2 - SINGLE LID DETAILS

SAMOA WATER AUTHORITY
 Level 2 TAITTE Building
 Apia, Sogi
 Ph: +685 20409
 Fax: +685 21298

SIZE A3	CONTRACT NUMBER: SWA-WW2W/2023	REVISION 1
SCALE: NTS	DRAWING NUMBER: WW2W - 001	